


RAZOR TRACKING

Edge Dash Camera Installation

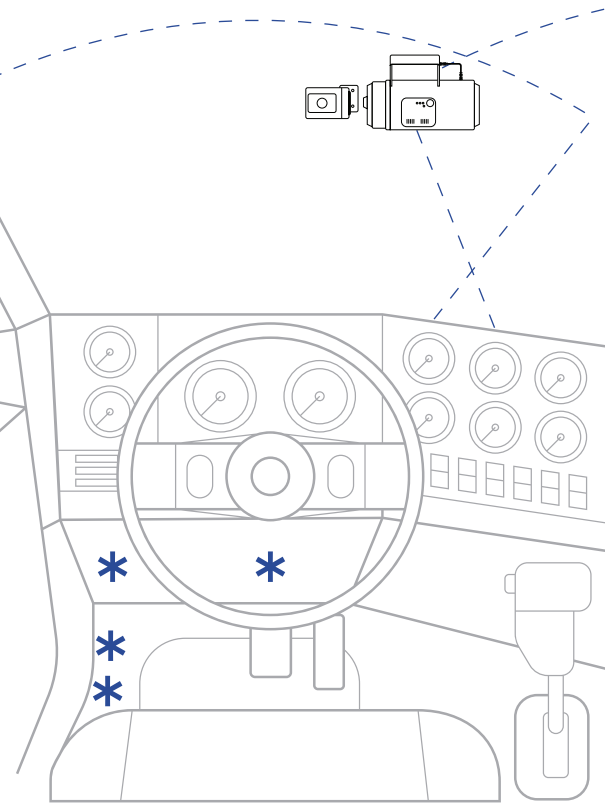

1. Getting Started

- Remove the adhesive film on the back of the camera, place the adhesive side on windshield and press firmly for 30 seconds
- Remove the cylindrical cover plate on the camera and adjust angle
- Connect the lead cable to the camera and place cover plate back on and lock it

2. Camera Installation

- Connect the other end of the lead cable to the ON/OFF switch box and insert the wire harness
 - Make sure that the switch box is turned to the ON position

3. Wired Installation

- Please make sure the vehicle is off
- Route the wire harness behind the interior panels of the vehicle toward the fuse box or power source
- Connect the three required wires

REQUIRED

- Red | Power (BAT+)
- Black | Ground (BAT-)
- White | Ignition (IGN+)

MORE →

4. Cable Management

- Run the cables and device to the desired location in the vehicle
- Secure the cables and device to ensure safe vehicle operation

5. Verify Device Installation

- Turn the vehicle's engine to "On"
- Wait up to 5 minutes for the green and blue LEDs to illuminate solid, if the LEDs do not light up the camera is not connected
 - Blue LED — GPS service
 - Green LED — Cellular service
 - Red LED — Power & Error

6. You're On The Map!

- Log-in to RazorTracking.net or open your app and start tracking!

Questions & Troubleshooting







- Call (833) GORAZOR, and select option 2, or visit our Help Center by clicking the ⓘ icon in the right panel once logged into Razor Tracking

SCAN ME!



ONLINE GUIDE

RAZOR TRACKING

-  Hours | 8 AM–5 PM CST | Mon–Fri
-  Sales | (833) GORAZOR, Option 1
-  Support | (833) GORAZOR, Option 2
-  Login | razortracking.net
-  Website | razortracking.com
-  Email | support@razortracking.com

